




B360 Pro FULLY RUGGED LAPTOP

- AI-ready with the latest Intel® Core™ Ultra Processors (Series 2) and Intel® AI Boost technology
- Optional NVIDIA® Quadro® RTX A500 4GB discrete graphic controller
- MIL-STD 810H, 6ft operating drop rating, IP66 certified, and optional salt fog resistant
- 13.3" FHD LumiBond display with Getac sunlight readable technology (1,400 nits) and capacitive touchscreen
- Enhanced enterprise security with optional dual user replaceable storage, Windows Hello face-authentication camera, integrated 1D/2D imager barcode reader and multi-factor authentication options
- LifeSupport battery swappable technology



B360 Pro 3D demo

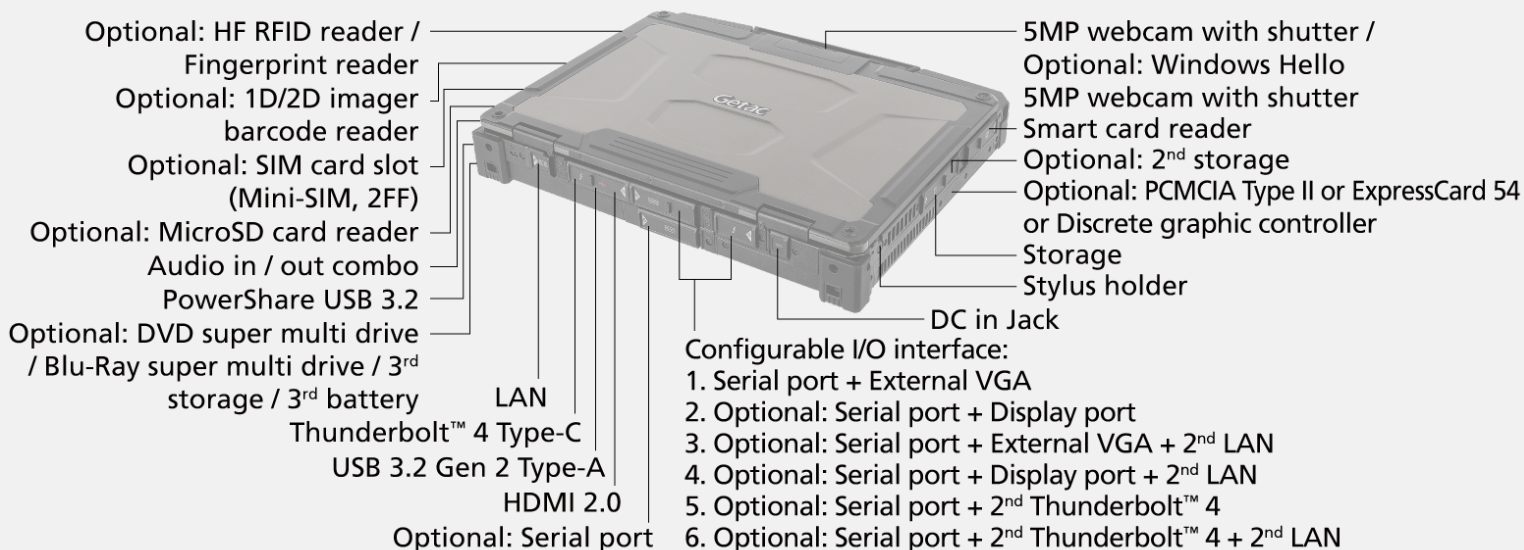

SPECIFICATIONS

Generation
G3

Operating System
Windows 11 Pro

Mobile Computing Platform
Intel® Core™ Ultra 5 processor 225H
Max. 4.9GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Platform options:
Intel® Core™ Ultra 5 processor 235H, vPro® Enterprise
Max. 5.0GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 255H
Max. 5.1GHz with Intel® Turbo Boost Technology
- 24MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 265H, vPro® Enterprise
Max. 5.3GHz with Intel® Turbo Boost Technology
- 24MB Intel® Smart Cache

Graphics
Intel® Arc™ Graphics ⁱ
Optional: NVIDIA® Quadro®
RTX A500 4GB discrete graphic controller ^{ii, iii}

NPU
Intel® AI Boost

Display
13.3" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,400 nits LumiBond display with
Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory
16GB DDR5
Optional: 32GB / 64GB DDR5

256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Optional 2nd storage ^{iv}:
256GB / 512GB / 1TB / 2TB PCIe NVMe SSD
Optional multimedia bay storage : 1TB / 2TB SATA SSD

Keyboard
LED backlit membrane keyboard

Pointing Device
Touchscreen
- Capacitive multi-touch screen

Touchpad
- Touchpad with two buttons

Audio
Integrated stereo speakers
Integrated dual-array microphone

Expansion Slot
Smart card reader x 1
Optional: Micro SD card reader x 1
Optional: Discrete graphics controller, or PCMCIA Type II, or ExpressCard 54
Optional: 1D/2D imager barcode reader

Multimedia Bay
Configurable options ^{v, vi} :
1. Optional: DVD super multi drive, or Blu-Ray super multi drive, or 3rd storage
2. Optional: 3rd battery

I/O Interface
5MP webcam x 1 ^{vii}
Audio in/out combo x 1
DC in Jack x 1
PowerShare USB 3.2 x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 1 ^{viii}
LAN (RJ45) x 1
HDMI 2.0 x 1
Docking connector x 1
Optional: SIM card slot x 1 (Mini-SIM, 2FF) ^{ix}
Optional: Windows Hello face-authentication
SMP camera (front-facing) x 1 ^x
Optional: RF antenna pass-through for GPS, WWAN and WLAN

Configurable I/O options ^{xi}:
1. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1
2. Serial port (9-pin; D-sub) x 1 + Display port x 1
3. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1 + 2nd LAN (RJ45) x 1
4. Serial port (9-pin; D-sub) x 1 + Display port x 1 + 2nd LAN (RJ45) x 1
5. Serial port (9-pin; D-sub) x 1 + 2nd Thunderbolt™ 4 Type-C x 1
6. Serial port (9-pin; D-sub) x 1 + 2nd Thunderbolt™ 4 Type-C x 1 + 2nd LAN (RJ45) x 1
7. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1
8. Serial port (9-pin; D-sub) x 2 + Display port x 1
9. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1 + 2nd LAN (RJ45) x 1
10. Serial port (9-pin; D-sub) x 2 + Display port x 1 + 2nd LAN (RJ45) x 1
11. Serial port (9-pin; D-sub) x 2 + 2nd Thunderbolt™ 4 Type-C x 1
12. Serial port (9-pin; D-sub) x 2 + 2nd Thunderbolt™ 4 Type-C x 1 + 2nd LAN (RJ45) x 1

Communication Interface
10/100/1000 base-T Ethernet
Intel® Wi-Fi 7 BE200, 802.11be
Bluetooth (v5.4) ^{xii}
Optional: Dedicated GPS with L1/L5 ^{xiii}
Optional: 4G LTE mobile broadband with integrated GPS ^{xii, xiii, xiv}
Optional: 5G Sub-6 with integrated GPS ^{xii, xiii, xv}
Optional: Dual SIM (Mini-SIM 2FF and e-SIM) ^{ix, xiv}

Security Feature
TPM 2.0
Kensington lock
Smart card reader
Getac Disk Wipe
Optional: Fingerprint reader ^{xv}
Optional: HF RFID reader ^{xvi, xvi}
Optional: Absolute Persistence®

Power
AC adapter (90W, 100-240VAC, 50/60Hz)
AC adapter (120W, 100-240VAC, 50/60Hz) ⁱⁱ
High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh) x 2
Optional: Multimedia bay Battery (11.1V, typical 4200mAh; min. 2080mAh) x 1
LifeSupport battery swappable technology

Dimension (W x D x H) & Weight
342 x 281 x 53.5mm (13.46" x 11.06" x 2.11")
3.08kg (6.79lbs) ^{xviii}

Rugged Feature
MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified ^{xix}
Vibration & 6ft (1.8m) drop resistant
Optional: ANS/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D) ^{xix}
Optional: Salt fog certified

Environmental Specification
Temperature ^{xx}
- Operating: -29°C to 63°C / -20°F to 145°F ^{xii}
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software
Getac Utility
Getac Geolocation
Getac Barcode Manager ^{xvii}
Optional: Absolute Secure Endpoint
Optional: Absolute Secure Access

Optional Software
Getac Driving Safety Utility
Getac VGPS Utility ^{xviii}

Accessories
High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh)
AC adapter (90W, 100-240VAC)
Capacitive stylus with tether

Optional:
Carry bag
High Capacity Li-ion Battery (10.8V, typical 6900mAh; min. 6600mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC)
AC adapter (120W, 100-240VAC) ⁱⁱ
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Capacitive stylus with tether
Protection film
Vehicle cradle ^{xxiv}
Vehicle dock ^{xxv}
Office dock
Spare SSD kit
100W Type-C adapter ^{xxv}

Bumper-to-Bumper Warranty
Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.
That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.
Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard
3 years Bumper-to-Bumper

B360 Pro FULLY RUGGED LAPTOP

- I. Units equipped with 16GB and dual channel memory come with Intel® Arc™ Graphics.
- II. 120W AC adapter is used for office dock and for device configured with discrete graphics card.
- III. Discrete graphics card, PCMCIA slot, and ExpressCard slot are mutually exclusive.
- IV. Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase.
- V. Option 1 and 2 are mutually exclusive.
- VI. Factory option. Not user swappable.
- VII. SMP webcam and optional Windows Hello face-authentication SMP camera (front-facing) are mutually exclusive options.
- VIII. The configuration with a discrete graphic controller does not support USB-C power delivery function.
- IX. Units with 4G/5G option come with an embedded SIM card slot.
- X. External VGA, Display port, and 2nd Thunderbolt™ 4 Type-C are mutually exclusive.
- XI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- XII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- XIII. Only available in the US, UK, EU, Australia, and New Zealand.
- XIV. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- XV. Fingerprint reader and HF RFID reader are mutually exclusive.
- XVI. HF (13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- XVII. Weight and dimensions vary from configurations and optional accessories.
- XVIII. MIL-STD-461 90W AC adapter sold separately.
- XIX. Available with limited configurations and environment conditions.
- XX. Tested by an independent third-party test lab following MIL-STD-810H.
- XXI. For optional DVD / Blu-Ray super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F.
- XXII. Available when barcode reader option is selected.
- XXIII. Models require either embedded or standalone GPSmodule.
- XXIV. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XXV. Do not support the configurations with discrete graphics card.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	-	1
Audio Output	-	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI 1.3	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-



Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford,
Shropshire TF3 3BJ, United Kingdom
Tel : +44 (0) 1952 207 222
Sales-Getac-UK@getac.com |
www.getac.com/en/
Copyright © 2025 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only,available specification shall be subjected to
quotation by request.